

Linear Post-Processor Unit

for Regatron Power Supplies




Linear Post-Processor Unit

Features

- The *Linear Post-Processor Unit* combines the advantages of a primary switched power supply like high efficiency, small outline, light weight, cost efficiency, with the fast, smooth linear controlled output capability of a linear power supply.
- To be used in combination with TopCon power supplies.
- Modular concept for easy power increase: Parallel, master-slave-operation of power supplies and *Linear Post-Processor Units*.
- Very fast digital controller features quick response time, enhanced dynamics and programmable control characteristics.
- User-friendly PC program available. This enables the user to communicate over the power supply to the *Linear Post-Processor Unit*.¹⁾
- Seamless integration into the well established TopControl software.
- Swiss made: developed, manufactured and tested in Switzerland by Regatron AG.

System Configuration (single Modules)

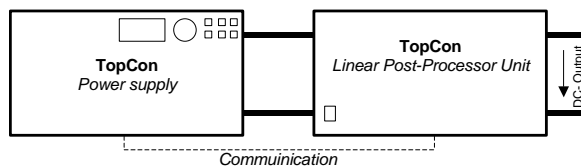

Regatron AG

Kirchstrasse 11
 CH-9400 Rorschach
 Switzerland
 Tel +41 71 846 67 67
 Fax +41 71 846 67 77
 www.regatron.com
 topcon@regatron.ch

45 A/22 A/1000 VDC

TC.LIN.SER.45.1000.45

Input requirements and output specifications

Mains input data (Auxiliary Supply)

Voltage..... 85 – 264 V_{AC}
 Frequency..... 48 – 62 Hz
 Input power 120 W

DC Input ratings

Input voltage 0 – 1000 V_{DC}
 Input current..... 45 A_{DCmax}
 Leakage current DC to PE < 10 mA

Output ratings

Output voltage range 0 – 1000 V_{DC}²⁾
 Drop Voltage (typical) 35 V³⁾
 Output current full range 0 – 45 A⁴⁾
 Output current half range 0 – 22 A
 Output Capacitor..... < 10 nF

Dissipation Power

Continuous power diss..... 1500 W⁵⁾
 Power diss. < 3 Min..... 2000 W⁶⁾
 Transient power diss..... Full SOA protection

Operating modes

AAP⁷⁾ current regulation..... 0 – 100 % I_{max}
 @ 0 – (V_{max}-V_{Drop})

Resolution

Voltage, current resolution 14.5 Bit⁸⁾

Static accuracy

Load regulation < ± 0.05 % FS typ.⁹⁾
 Line regulation < ± 0.05% FS typ.¹⁰⁾

Transient response time

Load regulation < 10 μs¹¹⁾
 Set value tracking < 50 μs¹²⁾

Stability

..... < ± 0.02 % FS¹³⁾

Temperature coefficient

Current, voltage < 0.01 % FS/°C¹⁴⁾

Remote sensing

Terminals on rear side cable voltage drop compensation

General specifications

Weight..... 23 kg
 Width front panel..... 483 mm
 Width housing 444 mm (19")
 Height front panel..... 265 mm
 Height housing..... 262 mm (6 U)
 Depth with output terminals 485 mm
 Depth housing..... 450 mm
 DC input terminals max..... 3 x 25 mm²
 (DC+, DC-, PE)
 DC Output terminals max 3 x 25 mm²
 (DC+, DC-, PE)
 Remote Sensing terminals max 2 x 10 mm²
 (DC+,DC-)

- 1) Most commonly used parameter are accessible via PC Program TopControl connected to TopCon power supply.
- 2) Maximum Output Voltage = Input Voltage – Drop Voltage.
- 3) Adjustable Value, the Drop Voltage influences directly the power dissipation.
- 4) Full Range / Half Range are selectable by PC program TopControl.
- 5) At ambient temperature 25 °C, for *current half range* 60 % of specified value.
- 6) For Drop Voltage < 250 V_{DC}, for *current half range* 50 % of specified value.
- 7) Application Area Programming, e.g. I(U) curves of solar panel / solar array.
- 8) Improved by using oversampling technics.
- 9) Typical value for 60 % to 70 % load variation, at voltage drop and temperature conditions.
- 10) Typical value for variation within 20 V to 60 V drop voltage, at constant load and temperature conditions.
- 11) Typical recovery time to within < ± 2 % band of set value for a load step 60 % to 70 %, ohmic load, voltage drop > 30 V and constant temperature conditions.
- 12) Typical recovery time to within < ± 2 % band of set value for a set value step 60 % to 70 %, ohmic load, voltage drop > 30 V and constant temperature conditions.
 line input and temperature conditions. Transient response time can be slightly affected by multi-unit operation.
- 13) Maximum drift over 6 hours after 30 minute warm-up time, at constant line input, load and temperature conditions.
- 14) Typical change of output values versus ambient temperature, at constant line input and load conditions.

Ambient conditions

Operating temperature 5 – 40 °C
 Storage temperature..... -25 – 70 °C
 Relative air humidity 0 – 95 %
 (non-condensing)

Cooling

Fans internal temperature-controlled

Safety

Type of protection (IEC 60529)

Basic construction IP 20
 Mounted in cabinet up to IP 53

Isolation

Line to output (auxiliary supply) 4000 V_{rms}
 Line to case (auxiliary supply) 2500 V_{rms}
 DC-Input, Output to case: ± 1000 V_{DC}, > 10 MΩ

Conformity CE-Marking

EMC Directive

EMC emission EN 61000-6-4
 EMC immunity EN 61000-6-2

Low Voltage Directive

Electronic equipment
 for use in power installations EN 50178

Standard programming interfaces

Control port

Isolation to electronics and earth: 125 V_{rms}
 Connector 15 pin D-sub, female
 on rear panel

Control port

Input functions Future use
 Output functions Future use

Standard programming interfaces (continued)

RS232

Isolation to electronics and earth: 125 V_{rms}
 Connector 9 pin D-sub, female
 on rear panel
 Baud rate 38400 baud
 Resolution (programming and readback):
 U, I 0.005 % FS

Ordering code

TC.LIN.SER.45.1000.45

Scope of delivery

TopCon Linear Post-Processor Unit ready to install,
 including:
 Operating manual language english
 RS232 cable length 1.8 m
 CAN bus CAN cable
 CANTerm Connector

Software

TopControl on Installation disc
 API (DLL file) for LabVIEW® and C/C++
 (and other programming languages,
 to be used in combination
 with TopCon Power Supplies.)